


Fire and Evacuation / Hochiki / Detectors

SOC-E3N(BLK)

Hochiki

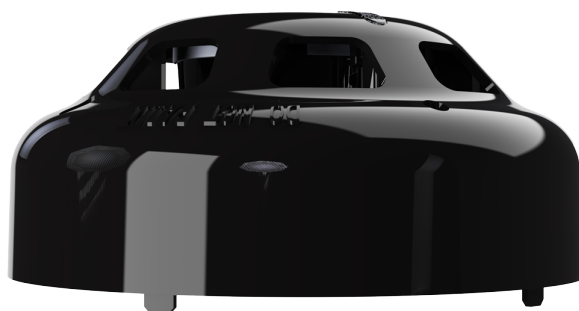

Features

- HOCHIKI
- Conventional photoelectric smoke detector
- Black housing
- Variable sensitivity
- Removable high-performance camera

Specifications

Reference	SOC-E3N(BLK)
Operating voltage	12 V - 30 V CC
Standby current (typical)	35 ?A
Maximum current alarm	40 mA
Current out of sensitivity (flashing red LED)	120 pA
Remote indicator unit	20 mA (max)
Operating temperature range	-10 ? to + 50 ?
Storage temperature range	-30 ? to + 60 ?
Maximum Humidity	95%RH - Non-condensing (at 40 ?)
Maximum Ingress protection rating	IP42
Case Color/Material	Black / ABS
Weight (grams)	95 (excluding base)
Diameter (mm) / Height (mm)	100 / 45