

SF-IPB025HA-2E

2 MP IP Camera


1/2.8" Progressive Scan CMOS

Compression H.265+, H.265, H.264+,
H.264

Built-in microphone

Lens 2.8 mm / IR LEDs Range 30 m

WEB, CMS Software, Smartphone
and NVR

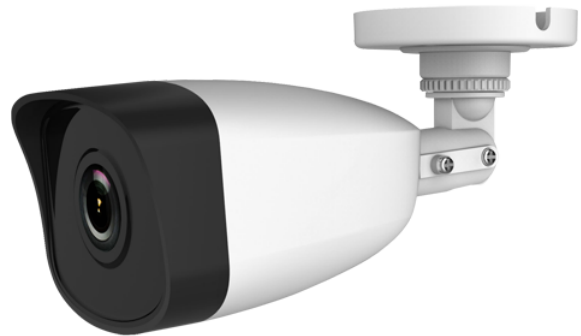

Safire

IP camera

ECO Range

1/2.8" Progressive Scan CMOS

2 Megapixel (1920x1080)

2.8 mm Lens

0 Lux

IR Range 30 m

Compression H.265+/H.265/H.264+/H.264

Built-in microphone

RJ-45 10/100 BaseT

PoE IEEE802.3af

Weatherproof IP66

IR Cut

WEB, CMS, Smartphone and NVR interface

ONVIF Compatible

Specifications

| | |
|----------------------|---|
| Brand | SAFIRE |
| Image sensor | 1/2.8" Progressive Scan CMOS |
| Maximum resolution | 2 Megapixel (1920x1080) |
| Main Stream rate | 30 fps (1920 x 1080, 1280 x 960, 1280x720) |
| Extra Stream rate | 30 fps x (640 360,x 320 240) |
| Compression | H.265+, H.265, H.264+, H.264 |
| Bitrate | 32 Kbps – 8 Mbps |
| Lens | 2.8 mm |
| Minimum illumination | 0.028 Lux (colour) / 0 Lux (B/N) |
| Infrared lighting | 0 Lux / IR LEDs (30 m) |
| Image improvements | WDR, BLC, 3D-NR, AWB, ROI, Motion detection, Mirror |
| Day / Night | Removable mechanical ICR filter |
| Audio | Integrated microphone |
| Network interface | Ethernet 10/100 BaseT |
| Remote access | Web browser, Safire Control Center Smartphone App and PC Software |
| Interoperability | ONVIF, PSIA, CGI, ISAPI |
| Power | 12 VDC / 300 mA, PoE IEEE802.3af |
| Degree of protection | Weatherproof IP66 |
| Temp. operation | -30° C ~ +60° C |
| Dimensions | 175 mm (D) x 70 (Ø) mm |
| Weight | 270 g |